



66240


PRIMA LED 1.4ft VP PCc 2600/840

8590515662401



- Degree of protection: IP66
- Ambient temperature: -25–45 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 143 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: PG 13.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 16
- Max. number of luminaires per circuit breaker C16: 27
- Flickering value Pst LM: 0,076
- Power factor: 0,95
- Stroboscope effect value SVM: 0,022
- Total harmonic distortion: 15
- Energy efficiency class of the light source: D

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: translucent PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Clips: stainless steel + polyamide
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless three-pole terminal block
- Featuring a vent plugs to eliminate the collection of condensate, the light fitting is suitable for installation in outdoor environments protected by a canopy
- Optimal mounting height: 3 to 8 m
- ON/OFF electronic driver (AC, DC on demand)

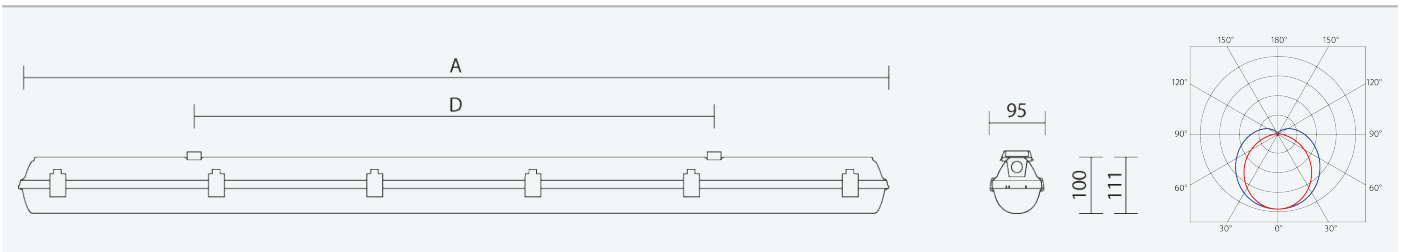

| Code  | Type                               | Ta Max.:<br>[°C] | Luminous flux of LED<br>modules<br>[lm] | Luminous flux of light<br>fitting:<br>[lm] | Power consumption:<br>[W] | System efficacy:<br>[lm/W] | Net weight:<br>[kg] | A<br>[mm] | D<br>[mm] |
|-------|------------------------------------|------------------|-----------------------------------------|--------------------------------------------|---------------------------|----------------------------|---------------------|-----------|-----------|
| 66240 | PRIMA LED 1.4ft VP<br>PCc 2600/840 | 45               | 2600                                    | 2310                                       | 16,1                      | 143                        | 1,9                 | 1272      | 700       |

The values stated for power consumption and luminous flux are in a tolerance of  $\pm 7.5\%$

## FEATURES



## CERTIFICATION



## DOWNLOAD

