



71240


PRIMA LED 1.4ft CLASS II PC 3200/840

8590515712403



- Degree of protection: IP66
- Ambient temperature: -25–45 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 145 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- 2, 4 or 6-pole connectors, conductor cross-sectional area of 1.5 or 2.5 mm²
- Protection class: II
- Max. number of luminaires per circuit breaker B16: 16
- Max. number of luminaires per circuit breaker C16: 27
- Flickering value Pst LM: 1
- Power factor: 0,95
- Stroboscope effect value SVM: 0,4
- Total harmonic distortion: 10
- Energy efficiency class of the light source: D

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: translucent PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Clips: polyamide + 15 % fibreglass
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless two-pole terminal block
- Light fitting suitable for railway vehicle repair shops, public transport platforms, switching stations, depots and laboratories without risk of explosion
- Optimal mounting height: 3 to 8 m
- ON/OFF electronic driver (AC, DC on demand)

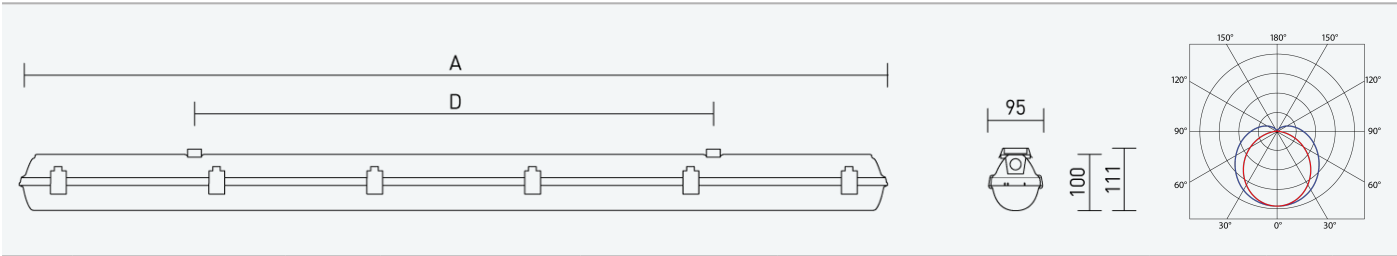

| Code | Type | Ta Max.: [°C] | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] | A [mm] | D [mm] |
|-------|--------------------------------------|------------------|---|--|---------------------------|----------------------------|---------------------|-----------|-----------|
| 71240 | PRIMA LED 1.4ft CLASS II PC 3200/840 | 45 | 3100 | 2760 | 19,1 | 145 | 1,7 | 1272 | 700 |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD





71240

PRIMA LED 1.4ft CLASS II PC 3200/840

8590515712403

