



72192



INNOVA 1.5ft PC 11000/840 1x5P

8590515721924



- Degree of protection: IP66/IP69
- Ambient temperature: -25–40 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 163 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- External terminal block, 3 or 5 poles, 1.5 or 2.5 mm2 wire cross-section
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 16
- Max. number of luminaires per circuit breaker C16: 27
- Flickering value Pst LM: 0,043
- Power factor: 0,95
- Stroboscope effect value SVM: 0,004
- Total harmonic distortion: 10
- Energy efficiency class of the light source: D

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: translucent PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Connection: external, 5-pole, 1.5 mm2 conductor cross-section (2.5 mm2 available on demand)
- Fully automated and comprehensive inspection of functionality and tightness during production, venting membrane prevents the creation of negative pressure or condensation
- Variable suspension spacing ranging from 700 - 980 mm; enable the light to be installed onto suspension fittings left over from previous lighting
- Basic beam angle, optimal mounting height of up to 6 m
- ON/OFF electronic driver (AC, DC on demand)
- External terminal box for connecting a power lead - plug&play system

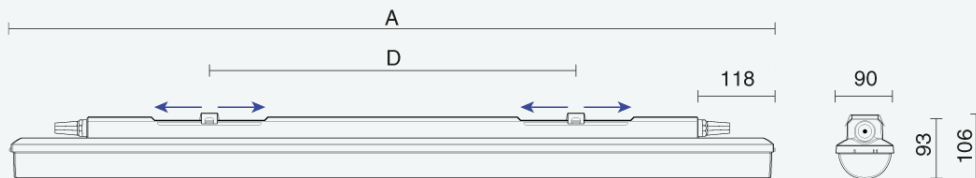

| Code  | Type                           | Ta Max.: [°C] | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] | A [mm] | D [mm]    |
|-------|--------------------------------|---------------|-----------------------------------|--------------------------------------|------------------------|-------------------------|------------------|--------|-----------|
| 72192 | INNOVA 1.5ft PC 11000/840 1x5P | 40            | 12310                             | 11570                                | 71,1                   | 163                     | 1,8              | 1450   | 700 - 980 |

The values stated for power consumption and luminous flux are in a tolerance of  $\pm 7.5\%$

## FEATURES



## CERTIFICATION



## DOWNLOAD





72192

INNOVA 1.5ft PC 11000/840 1x5P

8590515721924

