



72243


INNOVA 1.5ft NB PC 8000/840 DALI 1x5P

8590515722433



- Degree of protection: IP66/IP69
- Ambient temperature: -25–45 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 153 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- External terminal block, 3 or 5 poles, 1.5 or 2.5 mm² wire cross-section
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 18
- Max. number of luminaires per circuit breaker C16: 30
- Flickering value Pst LM: 1
- Power factor: 0,95
- Stroboscope effect value SVM: 0,4
- Total harmonic distortion: 10
- Energy efficiency class of the light source: C

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: translucent PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Connection: external, 5-pole, 1.5 mm² conductor cross-section (2.5 mm² available on demand)
- Fully automated and comprehensive inspection of functionality and tightness during production, venting membrane prevents the creation of negative pressure or condensation
- Variable suspension spacing ranging from 700 - 980 mm; enable the light to be installed onto suspension fittings left over from previous lighting
- Basic beam angle: narrow beam (NB); optimal mounting height: 8 to 12 m
- Digitally dimmable DALI driver (AC/DC)
- External terminal box for connecting a power lead - plug&play system

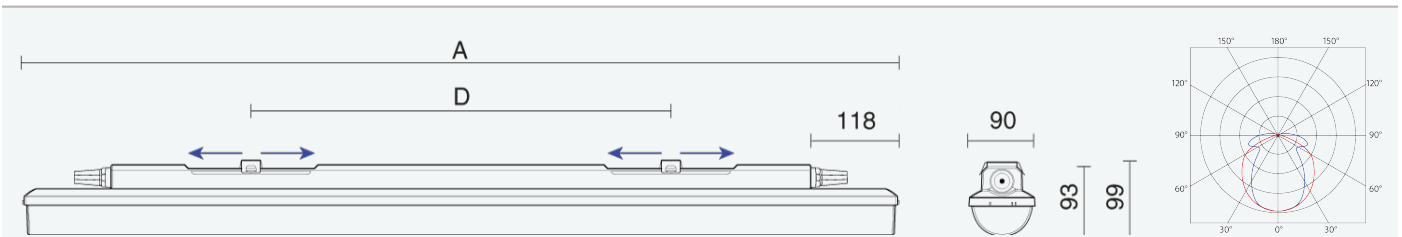

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
72243	INNOVA 1.5ft NB PC 8000/840 DALI 1x5P	45	7780	6770	44,3	153	1,9	1450	700 - 980

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD





72243

INNOVA 1.5ft NB PC 8000/840 DALI 1x5P

8590515722433

