



CODE

EAN

**72315**


**INNOVA 1.4ft WB PC 2600/840 2x3P**

**8590515723157**



- Degree of protection: IP66/IP69
- Ambient temperature: -25–50 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 140 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- External terminal block, 3 or 5 poles, 1.5 or 2.5 mm<sup>2</sup> wire cross-section
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 16
- Max. number of luminaires per circuit breaker C16: 27
- Flickering value Pst LM: 0,076
- Power factor: 0,95
- Stroboscope effect value SVM: 0,022
- Total harmonic distortion: 15
- Energy efficiency class of the light source: C

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: translucent PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Connection: external, 3-pole, 1.5 mm<sup>2</sup> conductor cross-section (2.5 mm<sup>2</sup> available on demand)
- Fully automated and comprehensive inspection of functionality and tightness during production, venting membrane prevents the creation of negative pressure or condensation
- Variable suspension spacing ranging from 420 - 700 mm; enable the light to be installed onto suspension fittings left over from previous lighting
- Basic beam angle: wide beam (WB); optimal mounting height: 2.5 to 5 m
- ON/OFF electronic driver (AC, DC on demand)
- External terminal box for connecting a power lead - plug&play system

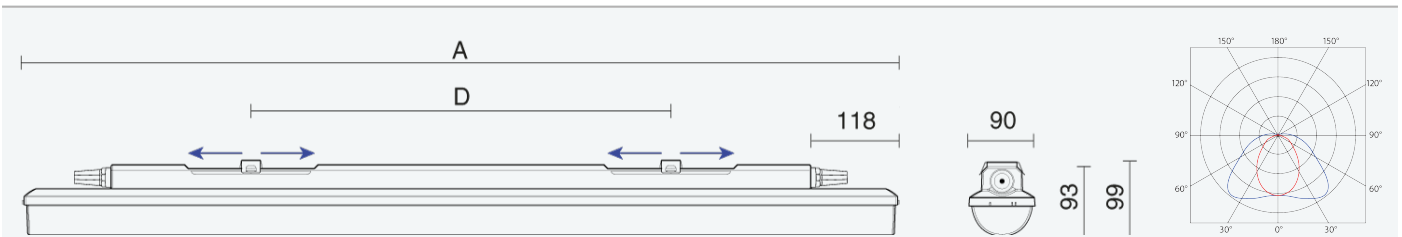

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
72315	INNOVA 1.4ft WB PC 2600/840 2x3P	50	2600	2260	16,1	140	1,6	1170	420 - 700

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

## FEATURES



## CERTIFICATION



## DOWNLOAD



