




- Degree of protection: IP65
- Ambient temperature: 0–35 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 141 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Terminal block: connector, 0.4 m cable
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 18
- Max. number of luminaires per circuit breaker C16: 30
- Power factor: 0,97
- Total harmonic distortion: 6
- Energy efficiency class of the light source: D

- Body: steel sheet, white (RAL 9003)
- Diffuser: satin, heat-strengthened safety glass
- Reflector: parabolic polished aluminium spotlight with narrow beam (NB) angle
- Sealing: EPDM glued to the base of the light
- Connection: connector, 0.4 m cable
- Light fitting for industrial environments with no risk of explosion caused by gas, dust or flammable vapours, for installation onto tall ceilings
- Heat-strengthened safety glass with shatter pursuant to ČSN EN 12150-1
- Digitally dimmable DALI driver (AC/DC), emergency back-up power supply with automated self-testing and 3 hour runtime
- Emergency back-up power supply for permanent and emergency lighting, connected to L3 (lum. flux 440lm)

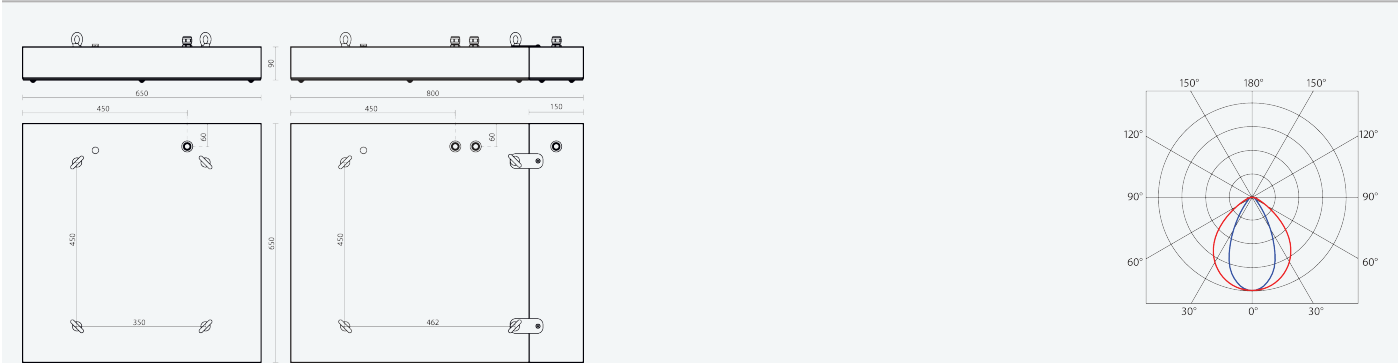

| Code  | Type                            | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] |
|-------|---------------------------------|-----------------------------------|--------------------------------------|------------------------|-------------------------|------------------|
| 74128 | CANOPUS NB 26000/840 DALI M3hAt | 26880                             | 22310                                | 158,3                  | 141                     | 13,4             |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP65

up to 0°C

up to 35°C

960°C

IK 10

LED

220-240 V 50/60 Hz

DALI

EMERGENCY

CRI >80

CCT 4000 K 3 SDCM

L90 B50

DOWNLOAD

INSTALLATION MANUAL

DATA SHEET

LDT DATA

