TREVOS

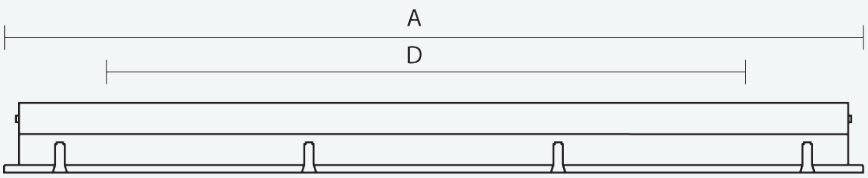
CODE | EAN


**79725** | ALUMAX LED 2.5ft MAX 11000/840 DALI | 8590515797257




- Degree of protection: IP66
- Ambient temperature: -40—65 °C
- Impact strength: IK10
- Life time: 150000 hours / L95 @25°C
- System efficacy: 129 lm/W
- Colour rendering index CRI: 80-89, 4000—4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: brass, M18X1.5
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 18
- Max. number of luminaires per circuit breaker C16: 30
- Flickering value Pst LM: 1
- Power factor: 0,98
- Stroboscope effect value SVM: 0,4
- Total harmonic distortion: 8
- Energy efficiency class of the light source: C

- Body: Grey aluminium profile, powder coated
- Diffuser: Satin, heat-strengthened safety glass
- Reflector: Steel sheet, white (RAL 9003)
- Clips: Stainless steel
- Sealing: Polyurethane (PUR) in the groove on the body
- Connection: Screwless five-pole terminal block
- Chemically resistant, dustproof and waterproof industrial light fitting made of painted aluminium alloy
- Heat-strengthened safety glass with shatter pursuant to ČSN EN 12150-1
- Digitally dimmable DALI driver (AC/DC)
- Light fitting for environments with high ambient temperature




| Code | Type | Ta Max.: [°C] | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] | A [mm] | D [mm] |
|---|---|---|---|---|---|---|---|---|---|
| 79725 | ALUMAX LED 2.5ft MAX 11000/840 DALI | 65 | 11160 | 8370 | 65,1 | 129 | 5,4 | 1524 | 1434 |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES




CERTIFICATION

DOWNLOAD

INSTALLATION MANUAL | DATA SHEET | CE | LDT DATA

TREVOS

CODE | EAN

**79725** | ALUMAX LED 2.5ft MAX 11000/840 DALI | 8590515797257