



79731




ALUMAX LED 1.5ft MAX 4000/840 1F

8590515797318



- Degree of protection: IP66
- Ambient temperature: -40–75 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 126 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: brass, M18X1.5
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 36
- Max. number of luminaires per circuit breaker C16: 61
- Flickering value Pst LM: 1
- Power factor: 0,98
- Stroboscope effect value SVM: 0,4
- Total harmonic distortion: 6
- Energy efficiency class of the light source: D

- Body: grey aluminium profile, powder coated
- Diffuser: satin, heat-strengthened safety glass
- Reflector: steel sheet, white (RAL 9003)
- Clips: stainless steel
- Sealing: polyurethane (PUR) in the groove on the body
- Connection: screwless three-pole terminal block, 3-wire connecting cabling for feed-through installation (1.5 mm² cross-section, 2.5 mm² available on demand)
- Chemically resistant, dustproof and waterproof industrial light fitting made of painted aluminium alloy
- Heat-strengthened safety glass with shatter pursuant to ČSN EN 12150-1
- ON/OFF electronic driver (AC, DC on demand)
- Light fitting for environments with high ambient temperature

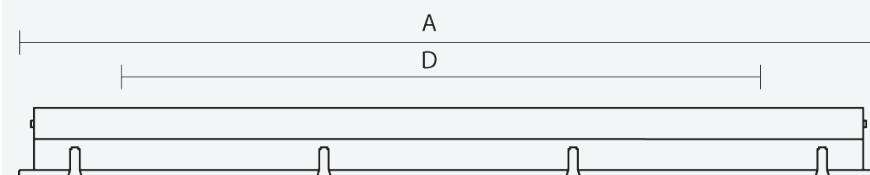

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
79731	ALUMAX LED 1.5ft MAX 4000/840 1F	75	3850	2930	23,3	126	5,1	1524	1434

The values stated for power consumption and luminous flux are in a tolerance of $\pm 7.5\%$

FEATURES



CERTIFICATION



DOWNLOAD





79731

ALUMAX LED 1.5ft MAX 4000/840 1F

8590515797318

