



**88130**


**PRIMA LED 1.2ft TRS PCc 2200/840**

**8590515881307**



- Degree of protection: IP66
- Ambient temperature: -25–40 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 144 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: PG 13.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 50
- Max. number of luminaires per circuit breaker C16: 85
- Flickering value Pst LM: 0,091
- Power factor: 0,95
- Stroboscope effect value SVM: 0,013
- Total harmonic distortion: 15
- Energy efficiency class of the light source: C

- Body: clear PC (high mechanical resistance, UV stability)
- Diffuser: clear PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003), modified for indirect lighting
- Clips: stainless steel + polyamide
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless three-pole terminal block
- Light fitting with a clear base, suitable for direct and indirect lighting of spaces with low clear height
- Optimal mounting height: 3 to 8 m
- ON/OFF electronic driver (AC, DC on demand)

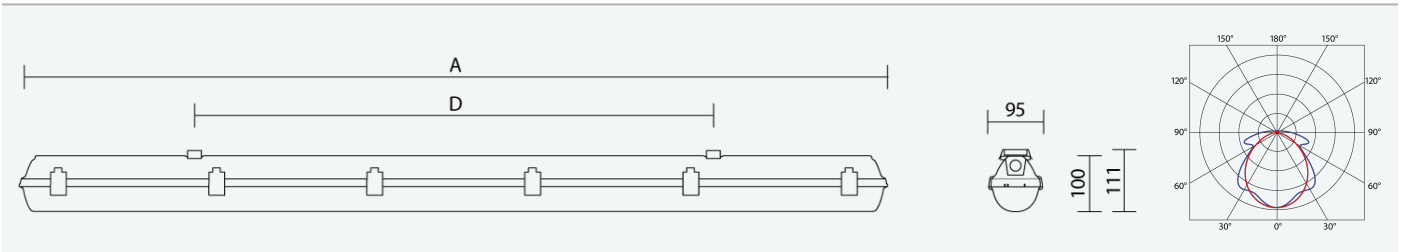

| Code  | Type                             | Ta Max.: [°C] | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] | A [mm] | D [mm] |
|-------|----------------------------------|---------------|-----------------------------------|--------------------------------------|------------------------|-------------------------|------------------|--------|--------|
| 88130 | PRIMA LED 1.2ft TRS PCc 2200/840 | 40            | 2140                              | 1900                                 | 13,2                   | 144                     | 1,3              | 662    | 350    |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD

