



95145


NAOS 2.4ft 6400/840 DALI

8590515951451



- Degree of protection: IP40
- Ambient temperature: -25–35 °C
- Impact strength: IK02
- Life time: 50000 hours
- System efficacy: 143 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 34
- Max. number of luminaires per circuit breaker C16: 57
- Flickering value Pst LM: 1
- Power factor: 0,96
- Stroboscope effect value SVM: 0,4
- Total harmonic distortion: 12
- Energy efficiency class of the light source: D

- Body: steel sheet, white (RAL 9003)
- Diffuser: acrylic (PMMA), sandblasted from both sides
- Connection: screwless five-pole terminal block
- Modern, low-profile light fitting for indoor lighting in offices, corridors and common rooms
- Opal diffuser made of highly permeable, translucent PMMA
- Digitally dimmable DALI driver (AC/DC)

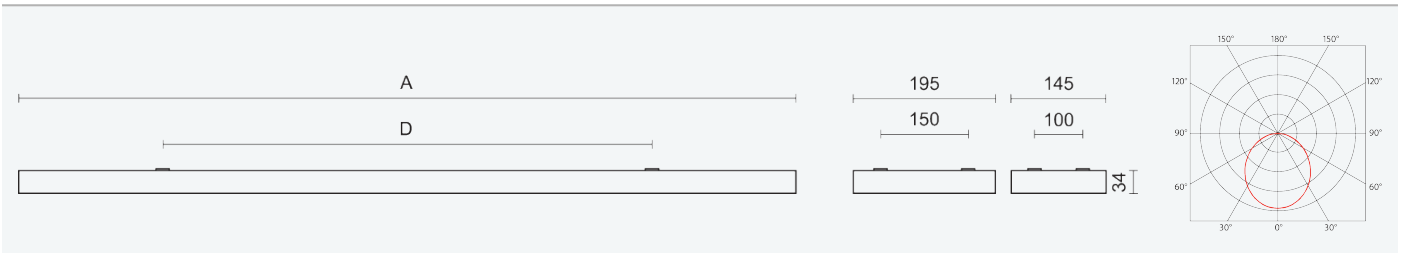

Code	Type	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
95145	NAOS 2.4ft 6400/840 DALI	6240	5180	36,3	143	4,6	1180	1030

The values stated for power consumption and luminous flux are in a tolerance of $\pm 7.5\%$

FEATURES



CERTIFICATION



DOWNLOAD

- INSTALLATION MANUAL
 DATA SHEET
 CE
 LDT DATA



95145

NAOS 2.4ft 6400/840 DALI

8590515951451

