TREVOS

CODE | EAN

**95435** | NAOS 2.4ft 5200/840 DALI s | 8590515954353

- Degree of protection: IP40
- Ambient temperature: -25—35 °C
- Impact strength: IK02
- Life time: 50000 hours
- System efficacy: 143 lm/W
- Colour rendering index CRI: 80-89, 4000—4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 34
- Max. number of luminaires per circuit breaker C16: 57
- Flickering value Pst LM: 1
- Power factor: 0,95
- Stroboscope effect value SVM: 0,4
- Total harmonic distortion: 12
- Energy efficiency class of the light source: D

- Body: steel sheet, aluminium white colour (RAL 9006)
- Diffuser: acrylic (PMMA), sandblasted from both sides
- Connection: screwless five-pole terminal block
- Modern, low-profile light fitting for indoor lighting in offices, corridors and common rooms
- Opal diffuser made of highly permeable, translucent PMMA
- Digitally dimmable DALI driver (AC/DC)

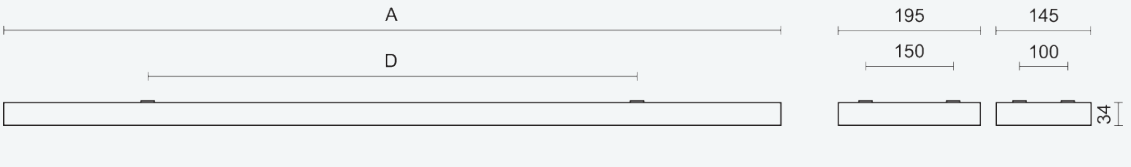


| Code | Type | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] | A [mm] | D [mm] |
|---|---|---|---|---|---|---|---|---|
| 95435 | NAOS 2.4ft 5200/840 DALI s | 5230 | 4340 | 30,3 | 143 | 4,6 | 1180 | 1030 |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP40 | up to ta -25°C | up to ta 35°C | LED | WARRANTY 5 | D | 220-240 V 50/60 Hz | DALI | CRI >80 | CCT 4000 K 3 SDCM | L90 B10

CERTIFICATION

CE

DOWNLOAD

INSTALLATION MANUAL | DATA SHEET | CE | LDT DATA

TREVOS

CODE | EAN
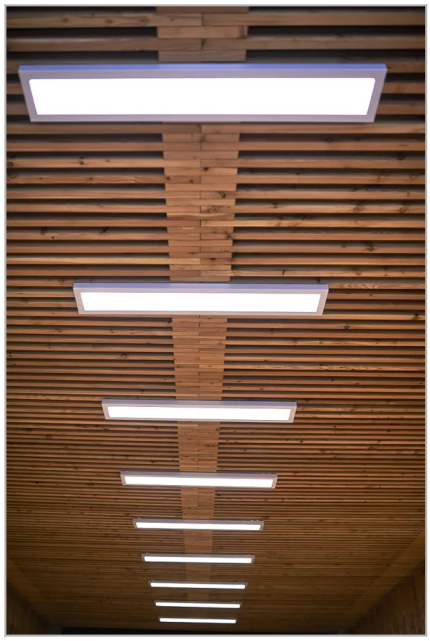
**95435** | NAOS 2.4ft 5200/840 DALI s | 8590515954353