TREVOS


CODE | EAN

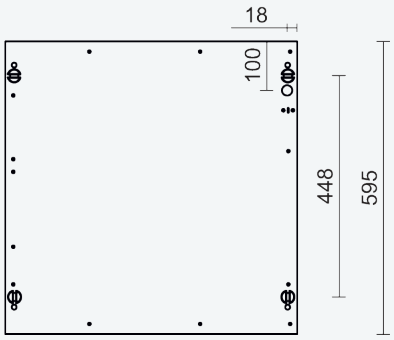
**95815** | NAOS SQUARE MPR 5200/840 DALI | 8590515958153




- Degree of protection: IP40
- Ambient temperature: -25—35 °C
- Impact strength: IK02
- Life time: 150000 hours / L95 @25°C
- System efficacy: 134 lm/W
- Colour rendering index CRI: 80-89, 4000—4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 34
- Max. number of luminaires per circuit breaker C16: 57
- Flickering value Pst LM: 0,022
- Power factor: 0,95
- Stroboscope effect value SVM: 0,4
- Total harmonic distortion: 12
- Energy efficiency class of the light source: C

- Body: Steel sheet, white (RAL 9003)
- Diffuser: Multi-layered micropyramid (MPR) optics for distributing light without glare in accordance with EN 12464-1 with UGR < 19
- Connection: Screwless five-pole terminal block
- Modern, low-profile light fitting for indoor lighting in offices, corridors and common rooms
- Diffuser with multi-layered micropyramid (MPR) optics, with UGR < 19
- Digitally dimmable DALI driver (AC/DC)




| Code | Type | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] |
|---|---|---|---|---|---|---|
| 95815 | NAOS SQUARE MPR 5200/840 DALI | 5650 | 4410 | 32,9 | 134 | 5,8 |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES




CERTIFICATION

DOWNLOAD

INSTALLATION MANUAL | DATA SHEET | CE | LDT DATA

TREVOS

CODE | EAN

**95815** | NAOS SQUARE MPR 5200/840 DALI | 8590515958153

