



100395


NANOTTICA 1.4ft WB PC 4400/840 1F

8596328003950



- Degree of protection: IP66/IP69
- Ambient temperature: -25–45 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 154 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: PG 13.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 16
- Max. number of luminaires per circuit breaker C16: 27
- Flickering value Pst LM: 0,076
- Power factor: 0,95
- Stroboscope effect value SVM: 0,022
- Total harmonic distortion: 15
- Energy efficiency class of the light source: C

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: clear PC with nano-optics (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Clips: polyamide + 15 % fibreglass
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless three-pole terminal block, 3-wire connecting cabling for feed-through installation (1.5 mm² cross-section, 2.5 mm² available on demand)
- Absolute control over emitted light thanks to patented nano-optics
- Variable suspension spacing ranging from 700 - 960 mm; enable the light to be installed onto suspension fittings left over from previous lighting
- Basic beam angle: wide beam (WB); optimal mounting height: 2.5 to 4 m
- ON/OFF electronic driver (AC, DC on demand)

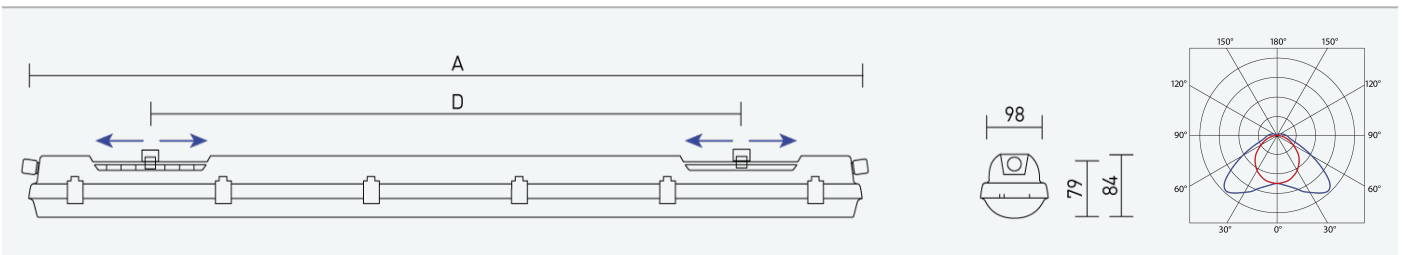

| Code | Type | Ta Max.: [°C] | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] | A [mm] | D [mm] |
|--------|-----------------------------------|---------------|-----------------------------------|--------------------------------------|------------------------|-------------------------|------------------|--------|-----------|
| 100395 | NANOTTICA 1.4ft WB PC 4400/840 1F | 45 | 4300 | 4000 | 26 | 154 | 1,8 | 1170 | 700 - 960 |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD

