TREVOS


CODE | EAN


100395 | NANOTTICA 1.4ft WB PC 4400/840 ML 1F | 8596328003950




- Degree of protection: IP66/IP69
- Ambient temperature: -25—45 °C
- Impact strength: IK10
- Life time: 150000 hours / L95 @25°C
- System efficacy: 154 lm/W
- Colour rendering index CRI: 80-89, 4000—4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: M20x1.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 30
- Max. number of luminaires per circuit breaker C16: 51
- Flickering value Pst LM: 0,076
- Power factor: 0,95
- Stroboscope effect value SVM: 0,022
- Total harmonic distortion: 15
- Energy efficiency class of the light source: C

- Body: Grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: Clear PC with nano-optics (high mechanical resistance, UV stability)
- Reflector: Steel sheet, white (RAL 9003)
- Clips: Polyamide + 15 % fibreglass
- Sealing: Polyurethane (PUR), foam-filled base groove
- Connection: Screwless three-pole terminal block, 3-wire connecting cabling for feed-through installation (1.5 mm2 cross-section, 2.5 mm2 available on demand)
- Absolute control over emitted light thanks to patented nano-optics
- Variable suspension spacing ranging from 700 - 960 mm; enable the light to be installed onto suspension fittings left over from previous lighting
- Basic beam angle: wide beam (WB); optimal mounting height: 2.5 to 4 m
- ON/OFF electronic driver (AC, DC on demand)

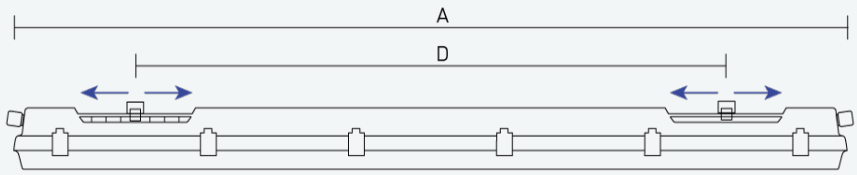





Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
100395	NANOTTICA 1.4ft WB PC 4400/840 ML 1F	45	4520	4200	27,3	154	1,8	1175	700 - 960

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD

INSTALLATION MANUAL | DATA SHEET | CE | ENEC | CB | HACCP | LDT DATA

TREVOS

CODE | EAN

100395 | NANOTTICA 1.4ft WB PC 4400/840 ML 1F | 8596328003950





