



101930


NANOTTICA 1.4ft CLASS II PCc 6400/840 3F M1h

8596328019302



- Degree of protection: IP66/IP69
- Ambient temperature: 0–25 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 159 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- 2, 4 or 6-pole connectors, conductor cross-sectional area of 1.5 or 2.5 mm2
- Protection class: II
- Max. number of luminaires per circuit breaker B16: 16
- Max. number of luminaires per circuit breaker C16: 27
- Flickering value Pst LM: 1
- Power factor: 0,96
- Stroboscope effect value SVM: 0,4
- Total harmonic distortion: 10
- Energy efficiency class of the light source: D

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: clear PC with nano-optics (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Clips: stainless steel + polyamide
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless four-pole terminal block, 4-wire connecting cabling for feed-through installation (1.5 mm2 cross-section, 2.5 mm2 available on demand)
- Absolute control over emitted light thanks to patented nano-optics
- Variable suspension spacing ranging from 700 - 960 mm; enable the light to be installed onto suspension fittings left over from previous lighting
- Basic beam angle: medium beam (MB); optimal mounting height: 3.5 to 8 m
- ON/OFF electronic driver (AC, DC on demand), emergency back-up power supply with 1 hour runtime
- Emergency back-up power supply for permanent and emergency lighting, connected to L3 (lum. flux 440lm)

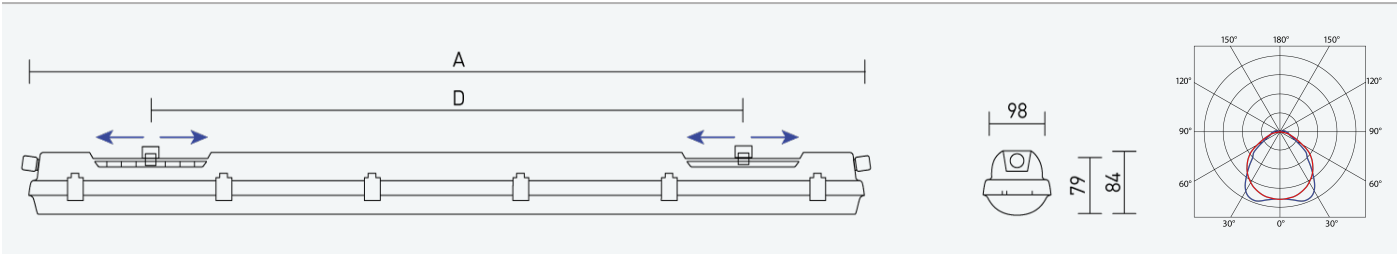

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
101930	NANOTTICA 1.4ft CLASS II PCc 6400/840 3F M1h	25	6120	5750	36,1	159	1,9	1170	700 - 960

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD





101930

NANOTTICA 1.4ft CLASS II PCc 6400/840 3F M1h

8596328019302

