



106746


PRIMA VALUE 1.4ft PCc 6400/840

8596328067464



- Degree of protection: IP66
- Ambient temperature: -25–45 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 140 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber (SBS)
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 16
- Max. number of luminaires per circuit breaker C16: 27
- Flickering value Pst LM: 0,076
- Power factor: 0,95
- Stroboscope effect value SVM: 0,022
- Total harmonic distortion: 15
- Energy efficiency class of the light source: C

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: translucent PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Clips: stainless steel + polyamide
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless three-pole terminal block
- Resistant to dust, humidity and spraying water, the light fitting is suitable for both indoor and outdoor roofed industrial spaces
- Variable suspension spacing ranging from 700 - 960 mm; enable the light to be installed onto suspension fittings left over from previous lighting
- Optimal mounting height: 3 to 8 m
- ON/OFF electronic driver (AC, DC on demand)

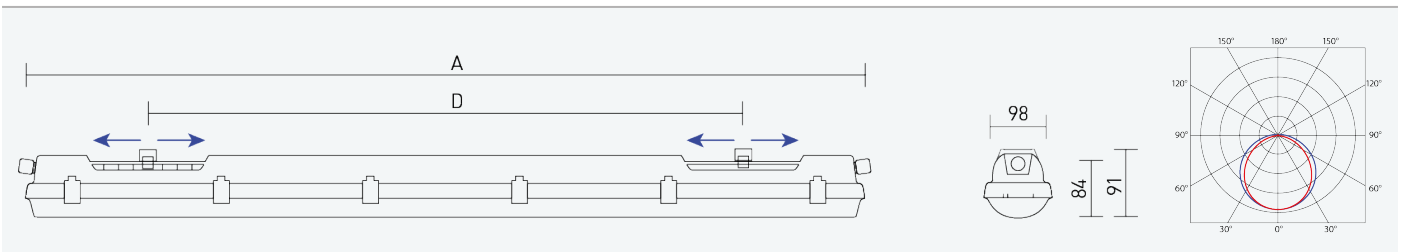

| Code | Type | Ta Max.: [°C] | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] | A [mm] | D [mm] |
|--------|--------------------------------|---------------|-----------------------------------|--------------------------------------|------------------------|-------------------------|------------------|--------|-----------|
| 106746 | PRIMA VALUE 1.4ft PCc 6400/840 | 45 | 6580 | 6120 | 43,8 | 140 | 1,7 | 1170 | 700 - 960 |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD

