



111422


PRIMA VALUE 1.5ft PC 4000/840 3F

8596328114229



- Degree of protection: IP66
- Ambient temperature: -25–45 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 137 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber (SBS)
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 34
- Max. number of luminaires per circuit breaker C16: 54
- Power factor: 0,95
- Total harmonic distortion: 20
- Energy efficiency class of the light source: C

- Body: Grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: Translucent PC (high mechanical resistance, UV stability)
- Reflector: Steel sheet, white (RAL 9003)
- Clips: Polyamide + 15 % fibreglass
- Sealing: Polyurethane (PUR), foam-filled base groove
- Connection: Screwless five-pole terminal block, 5-wire connecting cabling for feed-through installation (1.5 mm² cross-section, 2.5 mm² available on demand)
- Resistant to dust, humidity and spraying water, the light fitting is suitable for both indoor and outdoor roofed industrial spaces
- Variable suspension spacing ranging from 970 - 1230 mm; enable the light to be installed onto suspension fittings left over from previous lighting
- Optimal mounting height: 3 to 8 m
- ON/OFF electronic driver (AC, DC on demand)

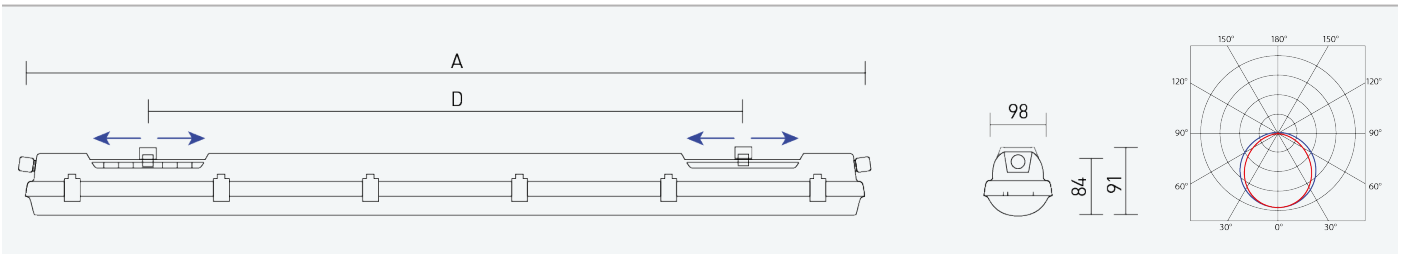

| Code | Type | Ta Max.: [°C] | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] | A [mm] | D [mm] |
|--------|----------------------------------|---------------|-----------------------------------|--------------------------------------|------------------------|-------------------------|------------------|--------|------------|
| 111422 | PRIMA VALUE 1.5ft PC 4000/840 3F | 45 | 3810 | 3540 | 25,8 | 137 | 2,2 | 1455 | 970 - 1230 |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD



