TREVOS


CODE | EAN


111442 | PRIMA VALUE 1.2ft ABS 2200/840 ML 1F | 8596328114427




- Degree of protection: IP66
- Ambient temperature: -25—40 °C
- Impact strength: IK06
- Life time: 150000 hours / L95 @25°C
- System efficacy: 140 lm/W
- Colour rendering index CRI: 80-89, 4000—4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber (SBS)
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 34
- Max. number of luminaires per circuit breaker C16: 57
- Power factor: 0,9
- Total harmonic distortion: 20
- Energy efficiency class of the light source: C

- Body: Dark grey ABS (high chemical resistance, UV stability, RAL 7001)
- Diffuser: Translucent acrylic (AC), UV stable, chemically resistant
- Reflector: Steel sheet, white (RAL 9003)
- Clips: Polyamide + 15 % fibreglass
- Sealing: Polyurethane (PUR), foam-filled base groove
- Connection: Screwless three-pole terminal block, 3-wire connecting cabling for feed-through installation (1.5 mm2 cross-section, 2.5 mm2 available on demand)
- Resistant to dust, humidity and spraying water, the light fitting is suitable for both indoor and outdoor roofed industrial spaces
- Variable suspension spacing ranging from 110 - 370 mm; enable the light to be installed onto suspension fittings left over from previous lighting
- Optimal mounting height: 3 to 8 m
- ON/OFF electronic driver (AC, DC on demand)

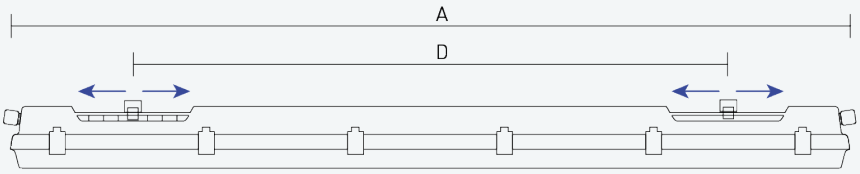





Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
111442	PRIMA VALUE 1.2ft ABS 2200/840 ML 1F	40	2190	2040	14,6	140	1,0	615	110 - 370

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP66 | up to ta -25°C | up to ta 40°C | 650°C | IK 06 | LED | WARRANTY 5 | D | 220-240 V 50/60 Hz | 1F | CRI >80 | CCT 4000 K 3 SDCM | L95 @25°C

CERTIFICATION

CE | EPD

DOWNLOAD

INSTALLATION MANUAL | DATA SHEET | CE | EPD | LDT DATA

TREVOS

CODE | EAN

111442 | PRIMA VALUE 1.2ft ABS 2200/840 ML 1F | 8596328114427







