



72366


INNOVA 1.5ft WB PC 4000/840 2x5P

8590515723669



- Degree of protection: IP66/IP69
- Ambient temperature: -25–50 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 144 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- External terminal block, 3 or 5 poles, 1.5 or 2.5 mm² wire cross-section
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 16
- Max. number of luminaires per circuit breaker C16: 27
- Flickering value Pst LM: 0,076
- Power factor: 0,95
- Stroboscope effect value SVM: 0,022
- Total harmonic distortion: 15
- Energy efficiency class of the light source: C

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: translucent PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Connection: external, 5-pole, 1.5 mm² conductor cross-section (2.5 mm² available on demand)
- Fully automated and comprehensive inspection of functionality and tightness during production, venting membrane prevents the creation of negative pressure or condensation
- Variable suspension spacing ranging from 700 - 980 mm; enable the light to be installed onto suspension fittings left over from previous lighting
- Basic beam angle: wide beam (WB); optimal mounting height: 2.5 to 5 m
- ON/OFF electronic driver (AC, DC on demand)
- External terminal box for connecting a power lead - plug&play system

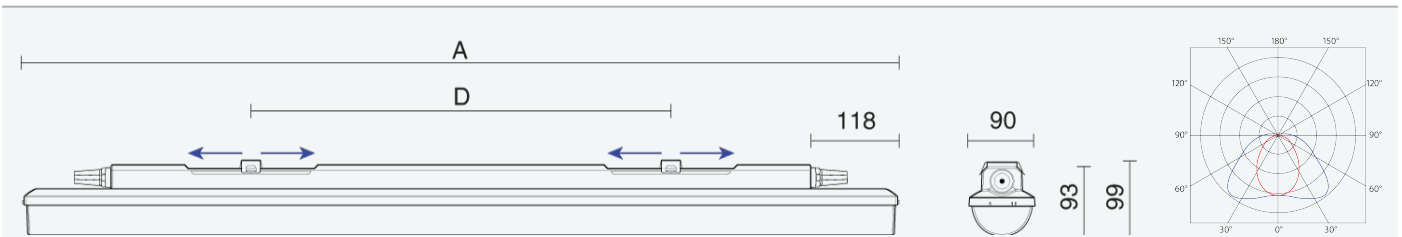

| Code | Type | Ta Max.: [°C] | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] | A [mm] | D [mm] |
|-------|----------------------------------|---------------|-----------------------------------|--------------------------------------|------------------------|-------------------------|------------------|--------|-----------|
| 72366 | INNOVA 1.5ft WB PC 4000/840 2x5P | 50 | 3850 | 3350 | 23,3 | 144 | 1,9 | 1450 | 700 - 980 |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD



