



74121


CANOPUS NB 26000/840 M1hAt

8590515741212



- Degree of protection: IP65
- Ambient temperature: 0–35 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 141 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Terminal block: connector, 0.4 m cable
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 18
- Max. number of luminaires per circuit breaker C16: 30
- Power factor: 0,96
- Total harmonic distortion: 6
- Energy efficiency class of the light source: C

- Body: steel sheet, white (RAL 9003)
- Diffuser: satin, heat-strengthened safety glass
- Reflector: parabolic polished aluminium spotlight with narrow beam (NB) angle
- Sealing: EPDM glued to the base of the light
- Connection: connector, 0.4 m cable
- Light fitting for industrial environments with no risk of explosion caused by gas, dust or flammable vapours, for installation onto tall ceilings
- Heat-strengthened safety glass with shatter pursuant to ČSN EN 12150-1
- ON/OFF electronic driver (AC, DC on demand), emergency back-up power supply with automated self-testing and 1 hour runtime
- Emergency back-up power supply for permanent and emergency lighting, connected to L3 (lum. flux 440lm)

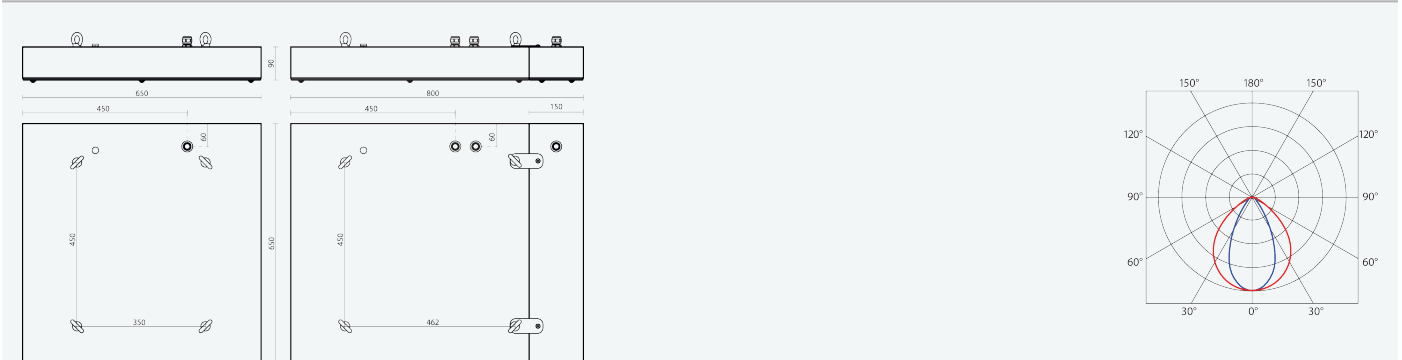

Code	Type	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]
74121	CANOPUS NB 26000/840 M1hAt	26880	22310	158,3	141	13,4

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD

