

**88181**


**PRIMA LED 1.5ft TRS PCc 3250/840 1F**

**8590515881819**



- Degree of protection: IP66
- Ambient temperature: -25–45 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 148 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: PG 13.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 16
- Max. number of luminaires per circuit breaker C16: 27
- Flickering value Pst LM: 0,076
- Power factor: 0,95
- Stroboscope effect value SVM: 0,022
- Total harmonic distortion: 15
- Energy efficiency class of the light source: C

- Body: clear PC (high mechanical resistance, UV stability)
- Diffuser: clear PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003), modified for indirect lighting
- Clips: stainless steel + polyamide
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless three-pole terminal block, 3-wire connecting cabling for feed-through installation (1.5 mm<sup>2</sup> cross-section, 2.5 mm<sup>2</sup> available on demand)
- Light fitting with a clear base, suitable for direct and indirect lighting of spaces with low clear height
- Optimal mounting height: 3 to 8 m
- ON/OFF electronic driver (AC, DC on demand)

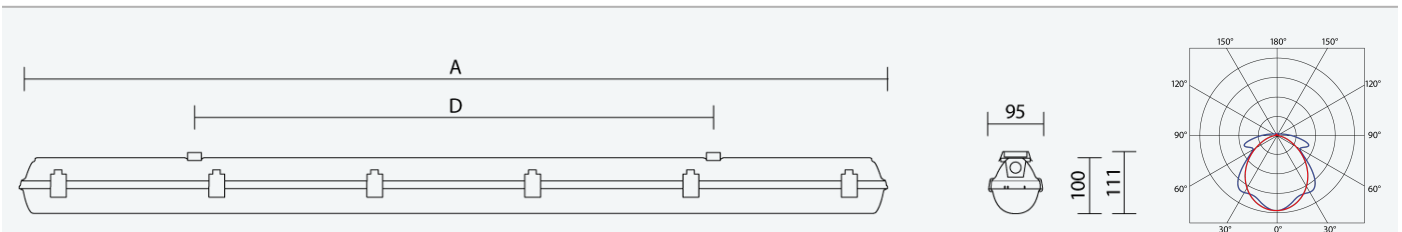

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
88181	PRIMA LED 1.5ft TRS PCc 3250/840 1F	45	3240	2880	19,5	148	2,3	1572	940

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %


FEATURES



CERTIFICATION



DOWNLOAD





**88181**

PRIMA LED 1.5ft TRS PCc 3250/840 1F

8590515881819

